


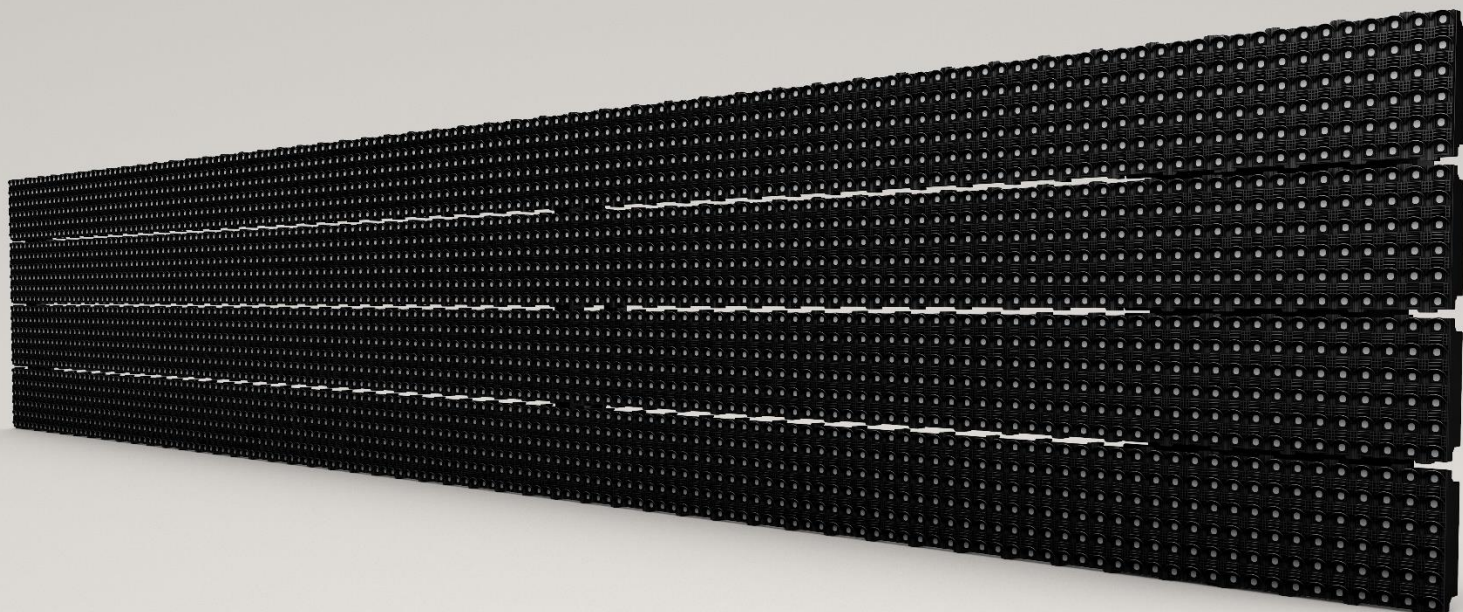

# MediaGrille®

Outdoor LED Display

**E 8C** Elite display

2018-V1.0




## PRODUCT SPECIFICATIONS

|                     |                                                                              |                       |
|---------------------|------------------------------------------------------------------------------|-----------------------|
| Product Model       | E-8C                                                                         |                       |
| Material            | Aluminum Body & PC Mask (can customize the color)                            |                       |
| LED Lamp            | SMD2727 (1R1G1B)                                                             |                       |
| Pixel Pitch         | 8 mm /8 mm                                                                   |                       |
| Resolution          | 15625 dot/m <sup>2</sup>                                                     |                       |
| Unit Permutation    | Horizontal   Vertical                                                        |                       |
| Unit Size           | 1408×256mm (Horizontal)                                                      | 256×1408mm (Vertical) |
| Resolution/unit     | 176×32 dots (Horizontal)                                                     | 32×176dots (Vertical) |
| Brightness          | Flagship LED : 4500-5000 nit      Premium High Brightness LED: 6000-6500 nit |                       |
| Weight              | (H)120°×(V)120°                                                              |                       |
| View Angle          | 19 kg/m <sup>2</sup>                                                         |                       |
| Input Voltage       | AC 110 -240 V                                                                |                       |
| Power Consumption   | Max. 850 w/m <sup>2</sup> Avg. 280 w/m <sup>2</sup>                          |                       |
| Installation        | Front & Back                                                                 |                       |
| Protection          | IP67                                                                         |                       |
| Gray Scale          | RGB 16384 bit (3×14bit)                                                      |                       |
| Refresh Rate        | ≥ 1920 Hz                                                                    |                       |
| Frame Rate          | ≥ 60 Hz                                                                      |                       |
| Working environment | Temperature: -30℃ to +60℃; Humidity: 10%-90%                                 |                       |
| Control system      | JV-A    JV-N                                                                 |                       |

※ Parameters will change according to the specific project

## PRODUCT APPEARANCE

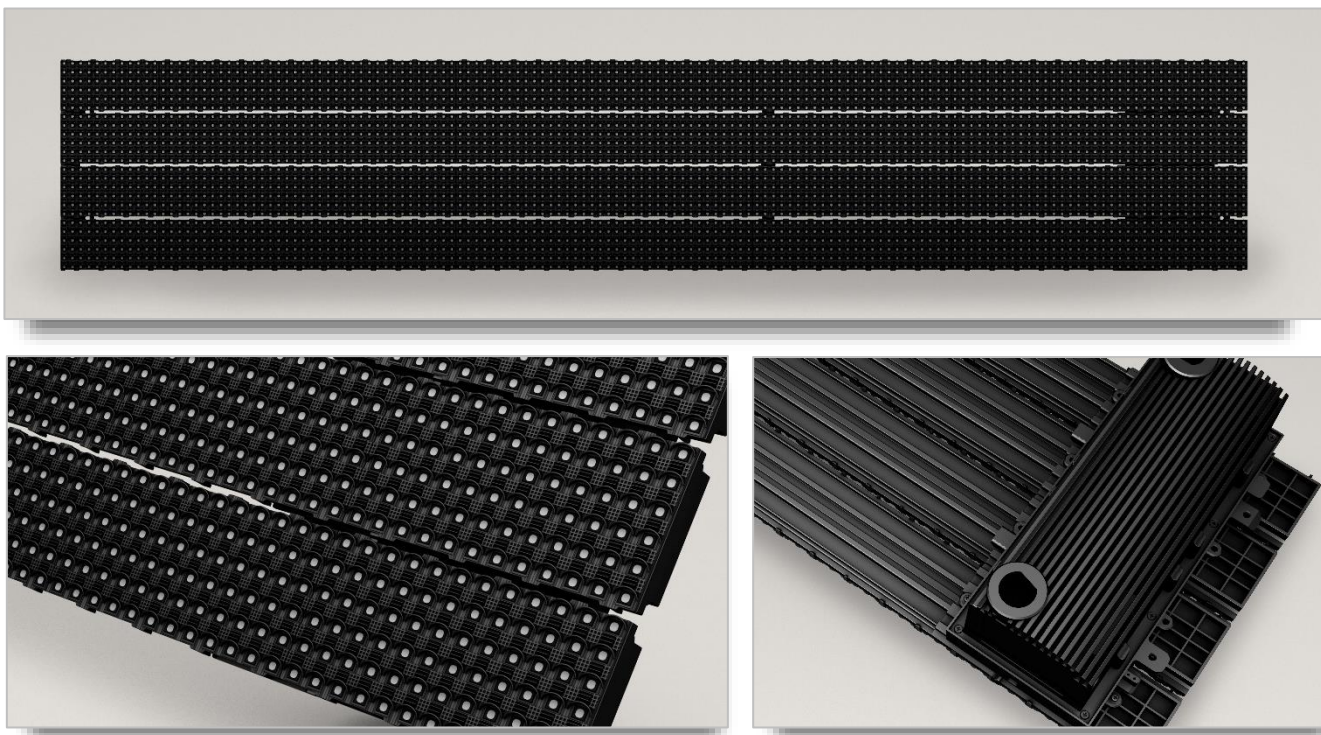

TECHNICAL DRAWING TECHNICAL DRAWING

1408mm (Length can be customized)

